
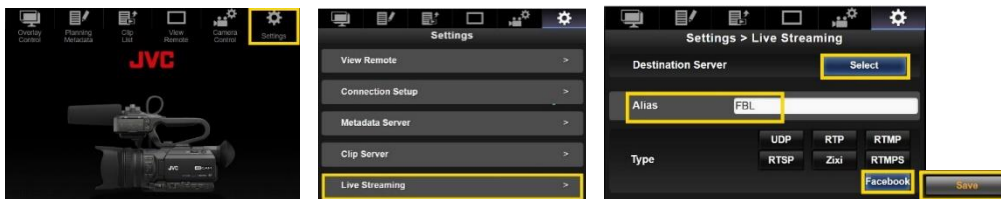


Streaming to Facebook Live using GY-HM250




1. Verify that the camera firmware is v0105-0019 or higher. Menu > System Information > Version.
2. If not, download the latest firmware from:
<http://support.jvc.com/pro/firmwareupgrade/versionentry.jsp?modelId=87>
Update instructions are included in the download package.
3. After update, set the correct Date/Time on the camera. Menu > System > Date/Time. Be mindful UTC changes during DST and Standard Time. **Setting the correct DATE/TIME is needed for FB Account authentication.**
4. Connect the recommended WLAN adaptor or LAN adaptor to the USB Host.
5. Turn Network to ON. Menu > System > Network > On
6. Connect the camera to the local network. Menu > System > Network Settings > Connection Wizard > Wizard
7. After network connection is established, network icon turns from yellow to white. 
8. Press STATUS button, scroll to Network page. Make note of the camera IP address.
9. Launch web browser using PC or tablet that is on the same network as the camera. Enter the camera IP address to the IP field. For Sign-in, the default Username/Password is jvc/0000.
10. On the camera GUI, click on Settings > Live Streaming > Server1.
11. For Alias, enter the name of destination server. For Type, select Facebook. Click on Select. Scroll down and click on SAVE button to load the settings.



12. Press Menu > Systems > Network Settings > Live Streaming Set > Log In > Enter.



13. Visit facebook.com/device on web browser and enter the Code.
14. When logged in to your account, confirmation screen appears.
15. From Streaming Server Set, choice options for Post, Event and Privacy are found.
16. Assign a streaming button using Menu > Camera Function > User Switch Set > USER. In this example , USER3 is assigned for Live Streaming.



17. Press the assigned Live Streaming button to start streaming.