

# The RM-LP350 Control Surface setup with KM-IP8S4

Download the RM-LP350.zip file from the JVC website: <http://pro.jvc.com/prof>

Unzip and save two files to the KM-IP8 desktop:

1. RM-LP350.vMixShortcutTemplate
2. RM-LP350.vMixActivators

# JVC

Professional Video

Handheld Cameras | Shoulder Cameras | Studio Cameras | PTZ Cameras | **System Components** | Production Monitors | Mobile/Multi Monitors | Reference Monitors

Top > Cameras > Remote Production (REMI) > DESKTOP vMIX CONTROL SURFACE > Software/Firmware Downloads

## RM-LP350G DESKTOP vMIX CONTROL SURFACE

MSRP: \$749.00

Product Details

Sales & Support

Price & Warranty

Contacts & Dealers

Software/Firmware


Downloads



RM-LP350\_setup.zip

Connect the USB cable to the KM-IP8 video switcher.

Press the Power button on the RM-LP350 control surface.

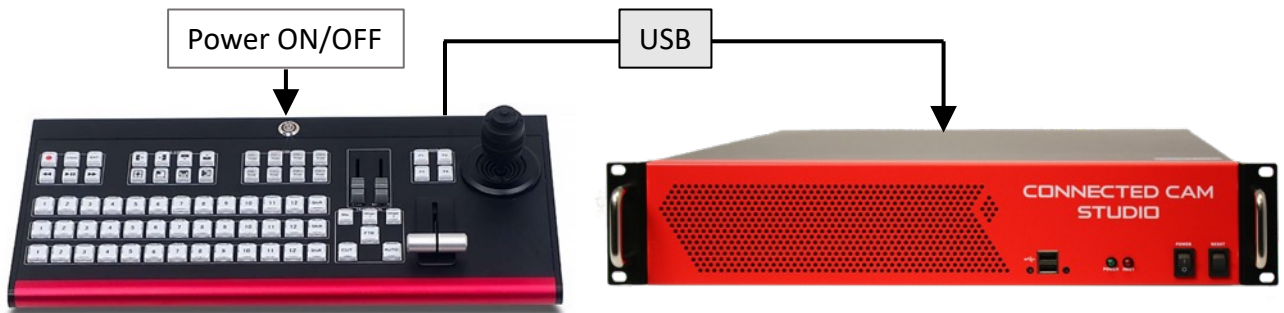

Check Windows *Device Manager* to confirm that the USB connection is established:


Device Manager - Sound, video and game controllers - **TY HD 1500 Switcher**

Reboot the KM-IP8 if the **TY HD 1500 Switcher** is not found

Launch vMix. 


Click **Settings** - **Shortcuts** – **MIDI Settings** – Enable TY HD Switcher – **OK**

Select **Templates** - **Import**, select **RM-LP350.vMixShortcutTemplate** - **Apply**

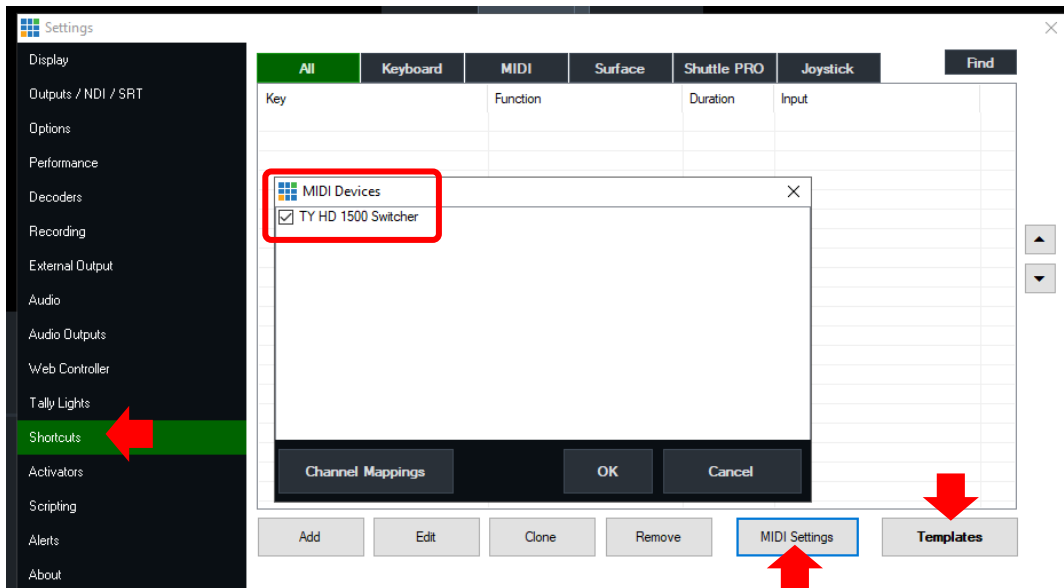

Click **Settings** - **Activators** – **Enable Devices** – Check TY HD 1500 Switcher – **OK**

Click **Import**, select **RM-LP350.vMixActivators** - **Apply** - **OK**

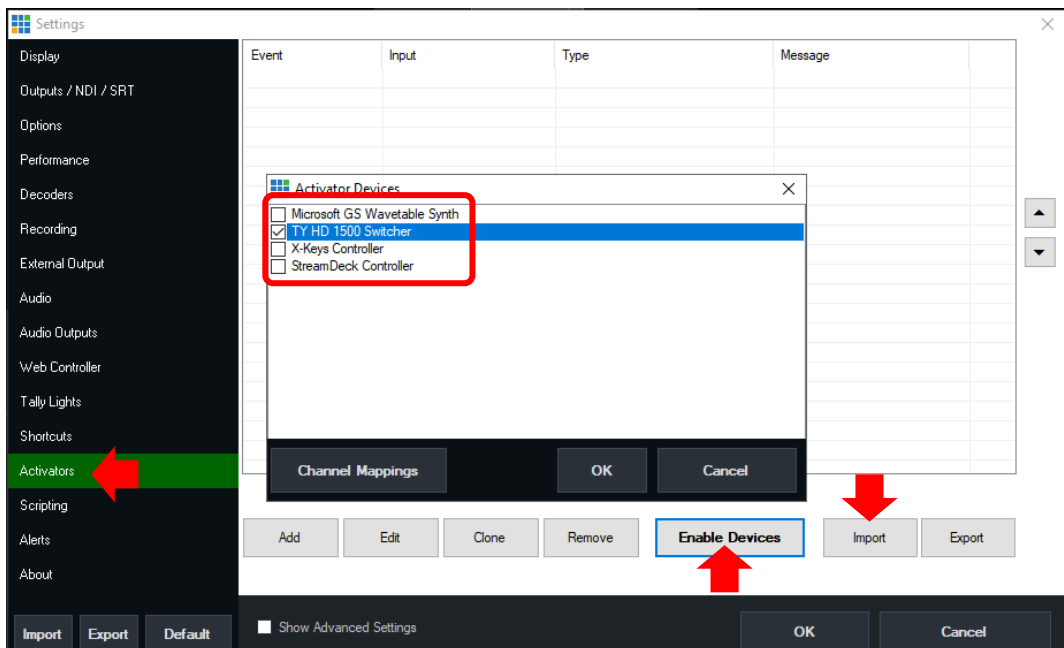

Reboot KM-IP8 to activate all settings.