



COMPACT JOYSTICK PTZ CONTROLLER RM-LP5G




Compact Joystick
PTZ Controller for
Easy Operation of KY-PZ510,
KY-PZ400 and KY-PZ200 Series PTZ Cameras


Features

- 5 camera / 5 preset PTZ camera operation with joystick and zoom control
- Supports VISCA, UDP, PELCO P/D control protocols over RS422, RS485, RS232 and IP
- 4-Color LED multi-screen display supports easy setup and operation

System Example

- Classroom System with 2x PTZ Cameras

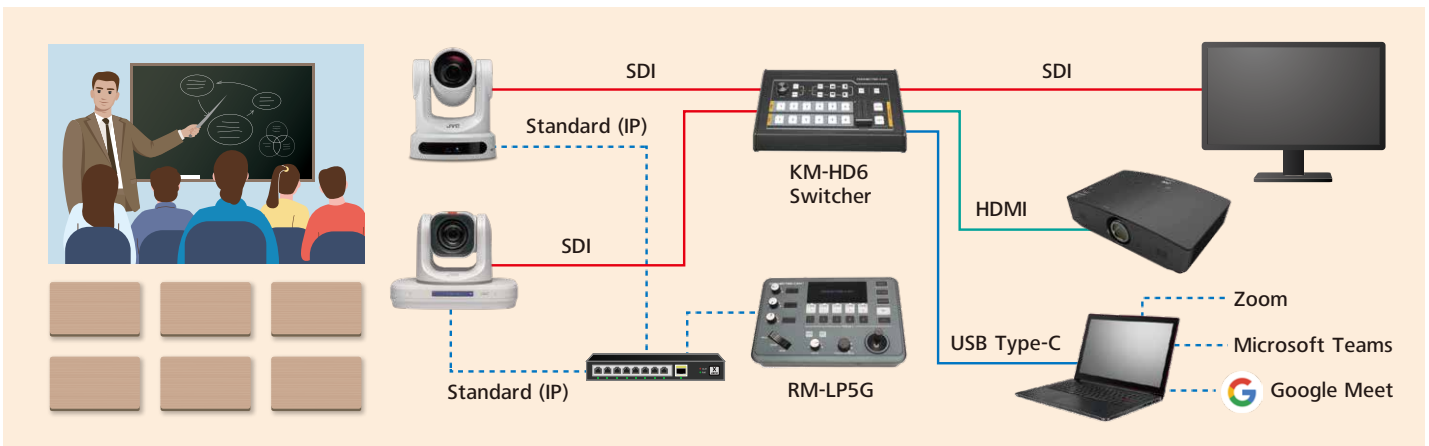

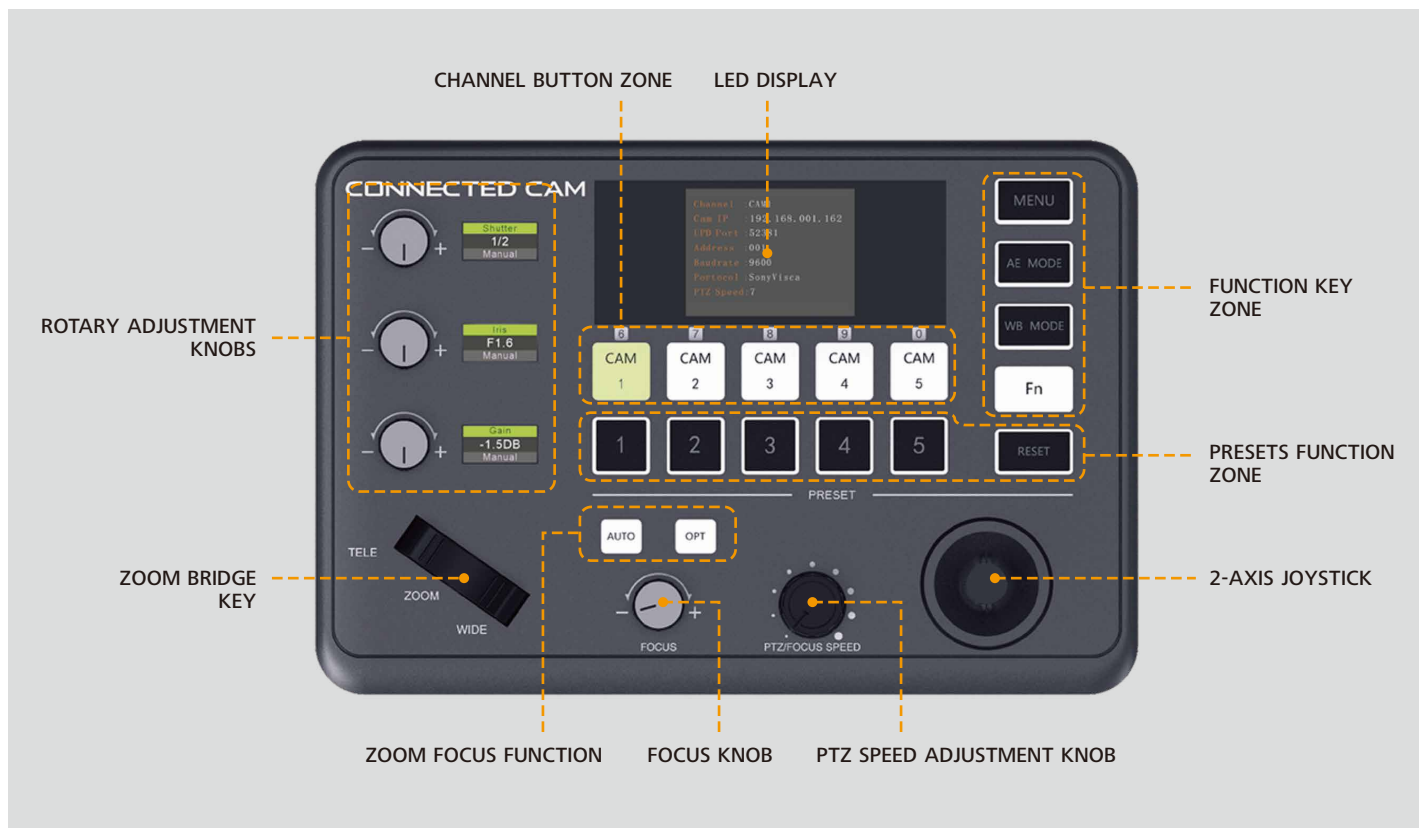

General Specification

Communication Control Interface

RS422 / RS485 Interface	Phoenix Contact 4 pin 3.81mm Terminal
RS232C Interface	DB9 Male Interface
LAN Interface	RJ45 Female Interface
Power Supply	JEITA type4 Female Interface

Camera Control and Operation

Camera Control Support Quantity	5
Communication Protocol	VISCA, PELCO P/D, UDP
Rotary Control Knobs	4
Joystick	2-Axis
Zoom	Tele-Wide Bridge Key
Focus Modes	Auto / Manual / OPT
Pan / Tilt Rotation Speed	7-Level Adjustment
Zoom In/Out Speed	7-Level Adjustment

Control Signal Format

Baud Rate	2350bps, 4800bps, 9600bps, 19200bps, 38350bps
Date Bits	8 Bit
Stop Bit	1 Bit
Parity bit	NONE
Internet Protocol	UDP / VISCA OVER IP

Power Supply and Consumption

Rated Voltage	DC 12V
Rated Current	0.3A max
Max Power Consumption	3.6W

Physical Features and Others

Password Privacy Protection	YES
Kensington Lock Slot	YES
Works Temperature	0°C ~ 40°C (32 °F ~ 104 °F)
Storage Temperature	-20°C ~ +60°C (-4 °F ~ 140 °F)
Dimensions (L x W x H)	244 x 164 x 48mm
G.W	1.1 kg
Accessories	Phoenix Contact 4 pin 3.81mm Terminal / Power Adapter / User Manual

All product and company names mentioned here are trademarks of registered trademarks of their respective owners. Simulated pictures. Values for weight and dimensions are approximate. E.&O.E. Design and specifications subject to change without notice. Copyright © 2023, JVCKENWOOD Corporation. All Rights Reserved.

DISTRIBUTED BY

JVC Professional Video website



USA pro.jvc.com