

# GY-HM850/890



## Firmware update procedure



JPE  
Gustav W. Emrich  
European Product Manager  
Creation & Presentation Products

Flexible for ENG and Studio application..  
Never been faster and quicker on NEWS ..

GY-HM850 ENG / GY-HM890 Studio Version  
***Firmware Update procedure***

**JVC**



Same as on the GY-HM650, Firmware update needs to be done time by time to get new features and improvements to the GY-HM8X0 series as well.

One of the important issue on this procedure will be to make sure you have a stable power connection before you start to do the Firmware update procedure !

## ***Firmware update procedure***



Download Firmware -- [www. JVCPRO.eu](http://www.JVCPRO.eu) under the “support” area.

- 1) Extract the Firmware to your Local Hard drive
- 2) Use a min. 4GB SDcard and Format this SDcard into the **camcorder**  
this is mandatory!
- 3) After this use a SDcard adapter or your SDcard slot build in your  
PC/Laptop
- 4) Copy the complete “Private Folder” from the Hard drive to the ROOT  
Directory of your SD Card
- 5) Overwrite confirmation to be agree.
- 6) **Now start to prepare the Camcorder as follows ...**

## ***Firmware update procedure***

- Make sure of an save and stable power connection, a power failure will make the camcorder unusable !
- Remove any SD card in slot A or slot B
- The following Buttons will be used....



- Switch off the camcorder at first

## ***Firmware update procedure***

- Make sure of an save and stable power connection, a power failure will make the camcorder unusable !
- The following Buttons will be used....



- Press F.Assist/4 and Menu/Thumb at the same time!
- Hold the buttons and switch on Power
- Still hold the 2 Button until a message comes up into the LCD Display !



- Switch on the camcorder
- This brings the camcorder into Update Mode



## ***Firmware update procedure***

- The message shows the next procedure....  
take your SDCard with the new Firmware into Slot B of the camcorder




## ***Firmware update procedure***

- Update process starts automatically ..



## ***Firmware update procedure***

- The Ready Update will be shown...
  - On the LCD and the 2 Slot indicator will Flash green
  - Now you must switch off the camcorder and remove any power support, DC / Battery and the SDcard as well
  - After this you can reconnect DC and Battery and start the camcorder regularly.

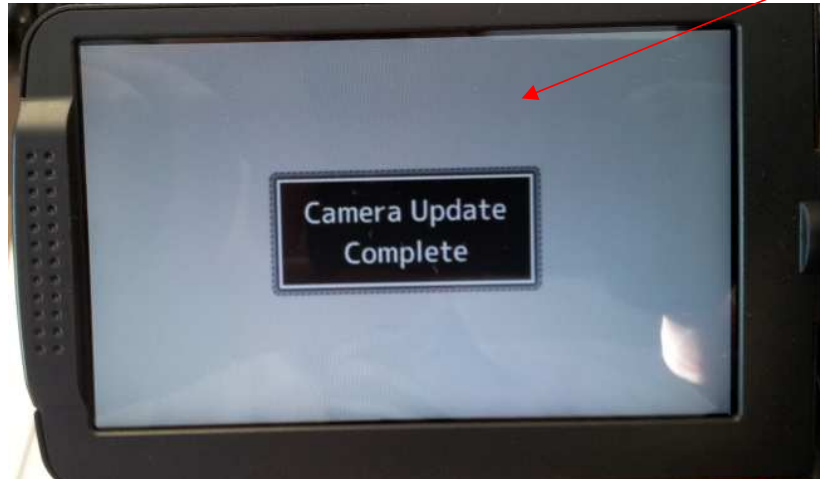



- **Update done !**
- **Enjoy the new Features or Improvements**



Thanks ...