

KY-PZ100 Firmware V0200 Updated Features and Instructions

9th Mar 2020

1. Added RTMPS Protocol support

Added RTMPS (RTMP over SSL) protocol for Live Streaming.

[Network]>>[Live Streaming]>>[Streaming Server]>>[Server**]>>[Type]

Added value “RTMPS”

KY-PZ100 supports following resolutions and bit rate of Live streaming with RTMPS protocol.

1280x720/ 30p / 3M、 1.5Mbps

1280x720 / 25p / 3M、 1.5Mbps

640x360 / 30p / 3M、 1.5M、 0.8M、 0.3Mbps


640x360 / 25p / 3M、 1.5M、 0.8M、 0.3Mbps

2. Added “ Startup Position “ in Pan/Tilt setting

[Pan/Tilt] >> Added [Startup Position] item

Setting Value : Initial (Default) , Preset 1 to Preset 10

Enable to select one position among Initial position or assigned 10 startup positions

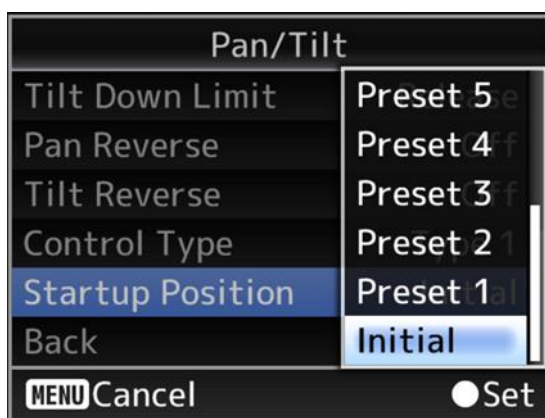

In case setting Preset 1 to Preset 10, move preset * position when KY-PZ100 started up.


*If no setting Pan/Tilt position ,move initial position when KY-PZ100 started up

In addition setting

[Network] >> [Livestreaming set...] >>[Auto Restart] select “On”

Enables to restart Livestreaming automatically in the preset P/T position

When setting “initial” in Startup position, Auto Restart livestreaming doesn’t work regardless of Auto Restart Setting On/Off

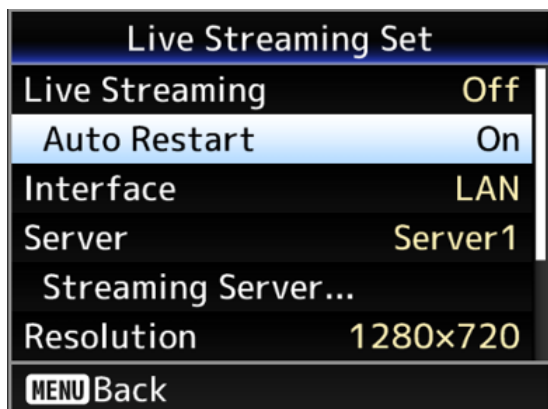

3. Added Get Pan/Tilt position API

Enables to get Pan/Tilt position (absolute position) with JVC WebAPI.
Please find the latest JVC Web API Reference .(Over V1.13)